



# complet

*lightweight, transparent & safe*

## Complet LPG Composite Cylinder Technical specification sheet

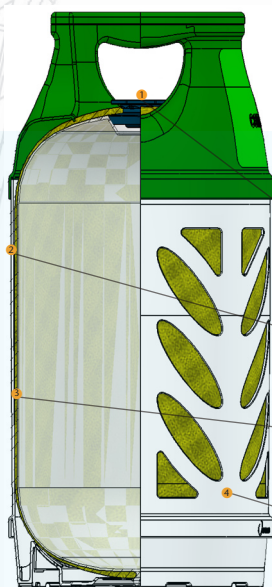

- ①: Integrated Boss for valve connection. Brass insert with injection molded polyethylene (HD). Welded to liner
- ②: Fiber Glass Composite layer  
Filament wound and UV Surface coated
- ③: Polyethylene (HD) Liner  
Blow molded
- ④: Polyethylene (HD) outer casing  
Injection molded in 3 parts

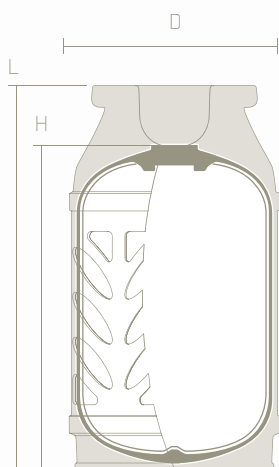

Propane capacity	5.0 kg / 11.0 lbs	7.5 kg / 16.0 lbs	10.0 kg / 22.0 lbs	14.0 kg / 31.0 lbs
Butane capacity	6.0 kg / 13.2 lbs	8.5 kg / 18.7 lbs	12.0 kg / 26.0 lbs	16.8 kg / 37.0 lbs
Water capacity	12.5 l / 27.5 lbs	18.2 l / 40.4 lbs	24.0 l / 53.0 lbs	34.0 l / 75.0 lbs
Overall Length (L)	384 mm / 15.24 in	460 mm / 18.1 in	571 mm / 22.5 in	720 mm / 28.3 in
Height to top of boss (H)	299 mm / 11.84 in	367 mm / 14.4 in	486 mm / 19.1 in	630 mm / 24.8 in
Diameter (D)	306 mm / 12.0 in	306 mm / 12.0 in	306 mm / 12.0 in	306 mm / 12.0 in
Tare weight (ex valve)	3.4 kg / 7.48 lbs	4.1 kg / 9.0 lbs	5kg / 11.0 lbs	7.5 kg / 16.5 lbs

All cylinder sizes/versions can be supplied with M26 x 1,5 or M34 x 1,5 thread for valve connection

Pressure ratings	Service pressure	Test pressure	Required burst pressure	Ragasco burst pressure
	20 bar / 294 psi	30 bar / 441 psi	60 bar / 882 psi	150 bar / 2200 psi

